

# PAC H64 JD 275HP FT4

Diesel - Qmax 1,950 USgpm - Hmax 500 ft



Indicative picture of the product

## PAC Head series

The pump system consists of a centrifugal pump and a separator, which enables air to be separated from the liquid and be sucked by a vacuum pump - making automatic priming possible. Even with suction heights of several feet the machine rapidly evacuates the air from the suction pipe and starts to pump. Additionally, thanks to the enclosed impeller, the PAC range is also suitable for pumping liquids with solids in suspension with best possible efficiency.

## Applications

The PAC H64 Atlas Copco pump is designed to withstand toughest applications and delivers best in class pumping efficiency. One of the most common area of utilization is the mining and Oil & Gas segment where reliability, efficiency and versatility is the key to provide a customized solution. Other suitable applications within Construction and General dewatering, Municipal as well as General Industry are ideal for the PAC H64 pump. Atlas Copco pumps are packed with features that not only meet, but exceed the needs of our customers.

## Benefits

### Efficiency

The 17" impeller with 69% efficiency at B.E.P. provides best pumping result with minimal efforts

### Solids handling

Closed impeller type with solids handling capability of 3" for trouble free operation

### Foot print

Best in class foot print for the transport of 3x PAC H64 pumps on same trailer.

### Serviceability

Semi cartridge seal and bolted front wear ring for easy service

### Polyethylene Fuel tank

Corrosion-free PE tank provides longer lifetime and avoids tank cleaning due to oxidation

# PAC H64 JD 275HP FT4




## Performance curves

Test according to UNI EN ISO 9906 standard - level 2

Losses from priming system and check valve not included

Test liquid: clean water, density 62.43 lb/ft<sup>3</sup> (8.345 lb/gal)

Speed	Impeller Dia.	Style	Solids Dia.	Ns	Suction	Discharge	No. Vanes
Various	17" / 440 mm	Enclosed	3" / 76 mm	2100 rpm	6" / 150 mm	4" / 100 mm	2

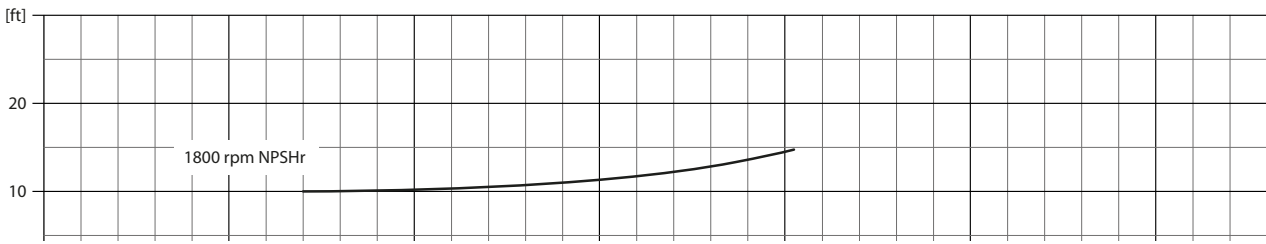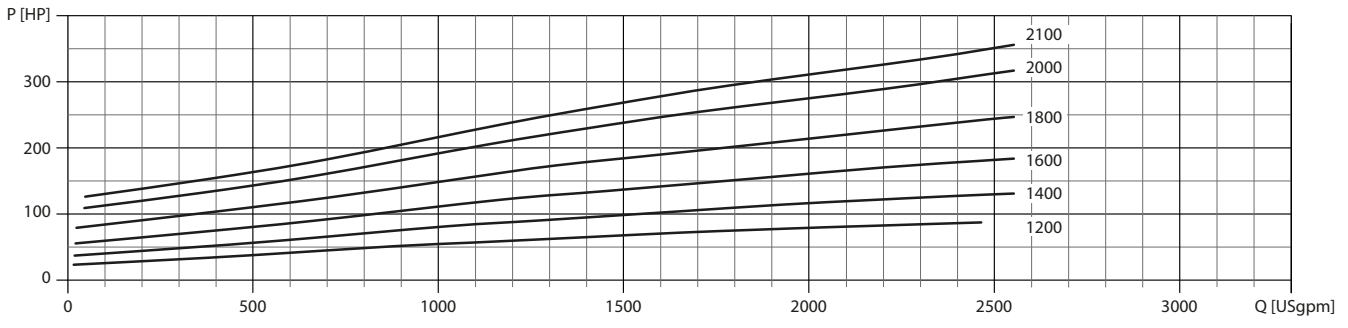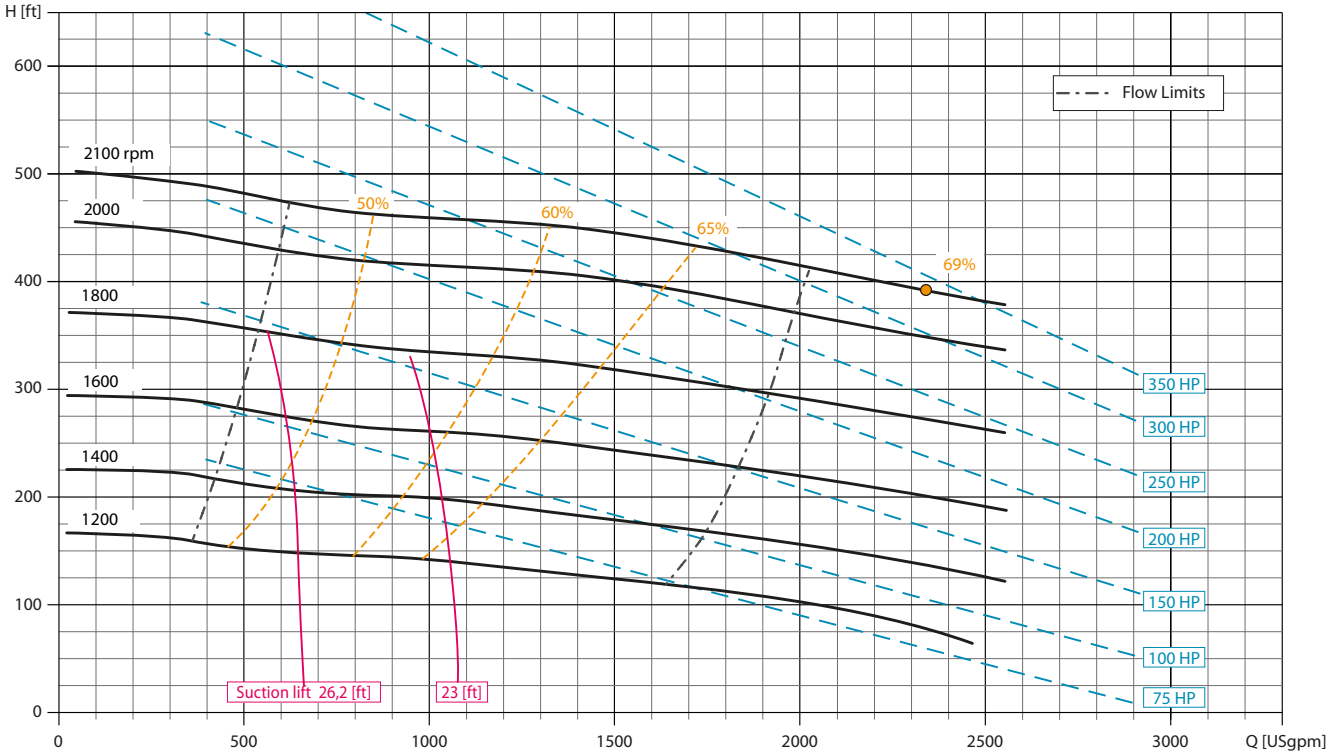

# PAC H64 JD 275HP FT4

## Technical data

### Pump

Model	PAC H64
Qmax	1,950 USgpm
Hmax	500 ft
Q max eff.	2,340 USgpm
Eff. max	69 %
Suction port	6" Flange - ANSI class 150
Delivery port	4" Flange - ANSI class 150
Impeller type	Enclosed, 2 vane
Impeller diameter	17"
Solids handling	3"
Material	
Casing	ASTM A536 ductile iron
Impeller	ASTM A743 CA6NM
Wear ring	ASTM A48 Class 20 grey iron
Wear plate	ASTM A48 Class 20 Grey Iron + NBR rubber coating
Shaft	AISI 630 stainless steel
Mechanical Seal faces	Silicon carbide Vs Silicon carbide
Elastomers	VITON
Check Valve	ASTM A536 ductile iron + NBR rubber flap
Separator	Steel

### Priming system

Vacuum pump	
Vacuum pump type	Diaphragm
Nominal air capacity	50.0 cfm
Max vacuum	- 26.6 inHg
Drives	Link belt

### Engine

Make	John Deere
Model	6068HFC08
Type	Diesel turbo common rail
Displacement	549 in <sup>3</sup>
No. cylinders	6
Cooling	Liquid with radiator
Rpm type	Variable
Max operating speed	2100 rpm
US emissions	EPA Tier 4F
Starting	Electric
Engine system voltage	24 V
Engine Power rating	275 HP

### Control panel

Model	PW 1000
	Manual operation
	Automatic operation: start-stop with transducers or floats
	FleetLink Optional

### Arrangement

Technical data	
Material	ASTM A36 steel
Coatings	Epoxy powder, average thickness of 3 MIL
Features	Lifting beam. Fork lift pockets. Pump access through hinged door. Protected PE fuel tank.
Battery	Acid charge Pb-Ca maintenance free, 2-12V 1100 CCA Batteries
Fuel tank capacity	173 USG
DEF tank capacity	9.2 USG
Fuel consumption	9.7 US Gal/hr @2100rpm
Dry weight	8,770 lbs
Wet weight	10,300 lbs

## Dimensional drawing

[in]

